

HYDRO-ULTRA MAT G 06



PRODUCT DESCRIPTION


HYDRO-ULTRA MAT G 06 is a normal duty needle-punched non woven geotextile made of 100% polypropylene staple fibers, which are formed into a random network for stability. Hydro-Ultra Mat 06 resist ultraviolet rays, rotting, biological degradation and most acids. Polypropylene is stable within ph range of 2 to 13.

PHYSICAL PROPERTIES

<u>Description</u>	<u>Test Method</u>	<u>Results</u>
Weight	ASTM D5261	06 /oz/yd ²
Grab Tensile	ASTM D4632	160 lbs
Grab Elongation	ASTM D4632	50 %
Trapezoid Tear	ASTM D4533	65 lbs
Puncture Strength	ASTM D4833	90 lbs
UV Resistance	ASTM D4355	70% @ 500 hr

PACKAGING

<u>Roll Dimensions</u>	15' x 300'
<u>Square yards per</u>	500 yd ²

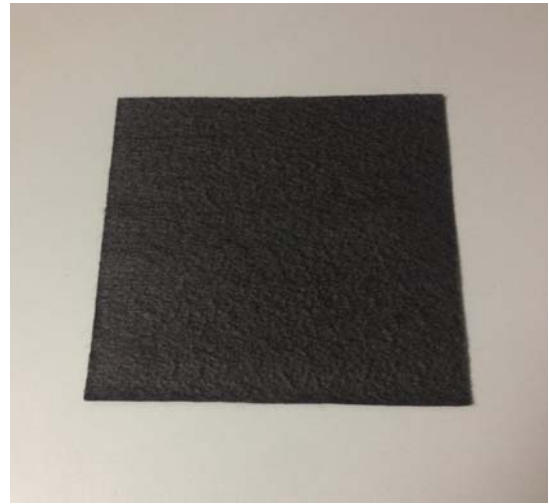

INSTALLATION

HYDRO-ULTRA MAT G 06 is installed in a multitude of fashions. Contact the manufacturer for specific installation instructions.

AVAILABILITY

HYDRO-ULTRA MAT G 06 is available from the manufacturer, vendors, or factory trained contractors.

PRODUCT USES

This version is a normal duty protection layer. Contact **HYDRO-GARD** for specific applications.