HYDRO-PRUFE® PVC WATERSTOP



PRODUCT DESCRIPTION

HYDRO-PRUFE® PVC Waterstop is an extruded PVC Waterstop used in the application of the HYDRO-PRUFE® PVC 80 mil waterproofing system. It is primarily used to create compartmentalization within the HYDRO-PRUFE® PVC waterproofing system in belowgrade applications. The compartments or segments create individual cells within the HYDRO-PRUFE® waterproofing system. These cells are designed to allow localized compartments and when the Alko injection hoses are placed within the cells it allows for future injection if the HYDRO-PRUFE® PVC system is breached or damaged. Waterstop-B or Hydro-Gard Swell Tape are adhered to the three sides of the HYDRO-PRUFE® PVC waterstop and will hydrate and swell when in contact with water closing off the compartments.

APPLICATION

Waterstop shall be heat welded in segments as determined by manufacturer and designer. Heat weld to surface of PVC sheet membrane in compartmentalized fashion.

PACKAGING


COILS OF 100 LF EA



The information, data and suggestions contained herein are believed to be reliable, based upon our knowledge and experience. For the most up to date information, please visit www.hydro-gard.com. HYDRO-GARD accepts no responsibility for the results obtained through application of this product. HYDRO-GARD reserves the right to update information without notice.

HYDRO-PRUFE® PVC WATERSTOP



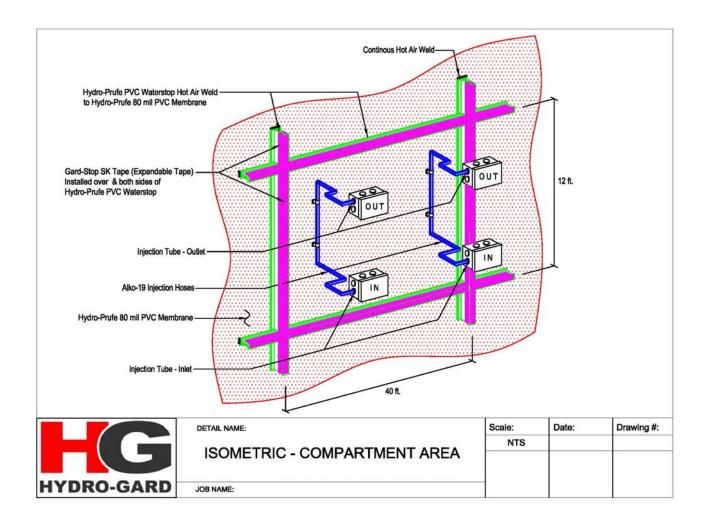

The information, data and suggestions contained herein are believed to be reliable, based upon our knowledge and experience. For the most up to date information, please visit www.hydro-gard.com. HYDRO-GARD accepts no responsibility for the results obtained through application of this product. HYDRO-GARD reserves the right to update information without notice.